

	08.0-BCX-SS-R								POTOMAC
	QTY		DESCRIPTION		PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
	8	45" LE	ED 3500K, FROSTED, 24V		LG-FX-XXX-X	115V	1	0.09	0.72
	4	EVAPORATOR FAN			RF-FA-XXXX	115V	1	0.17	0.68
CIRCI		IIT#1 (LIGHTS) TOTAL AMPS: 0.72			VOLTAGE:115/1/60		CONNECTION: HARDWIRED		
	CIRCUIT#2 (FANS)		TOTAL AMPS: 0.68		VOLTAGE:115/1/60		CONNECTION: HARDWIRED		
CIRCUIT#3 (CONV. OUTLET)		IIT#3 (CONV. OUTLET)	TOTAL AMPS:20.00		VOLTAGE:115/1	CONNECTION: HARDWIRED			

BTUH:8000

APPLICATION: BAKERY / PASTRY

DEFROST: TIME-OFF, 4/30MIN, 47° TEMP TERMINATION

SHIPPING DIMENSIONS: 108" X 48" X 60"


WEIGHT: 1220 LBS

CONFORMS TO UL STD 471. CONFORMS TO NSF STD 7. CERTIFIED TO CAN/CSA STD

MODEL: BCX-SS





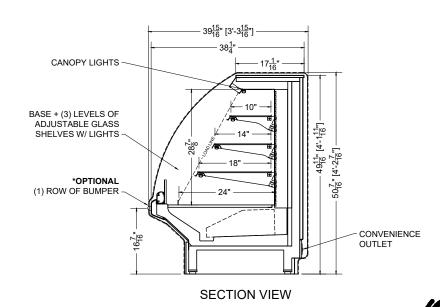



EVAP TEMP: 22°F

PACKOUT VOLUME: 26.66 CUBIC FT.

INTERNAL VOLUME: 33.94 CUBIC FT.