

PLAN MECHANICAL VIEW

04.1-MDD-81TSCF-S (SELF-CONTAINED, 2 DOOR)


MYSTIC

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
4	22" LED 4000K, 24V	LG-FX-XXX-X	208-230V	1	0.32	1.28
1	45" LED 4000K, 24V	LG-FX-XXX-X	208-230V	1	0.50	0.50
4	EVAPORATOR FAN	AFXXX	208-230V	1	0.10	0.40
1	TOP DEFROST HEATERS	---	208-230V	1	3.68	3.68
1	BOTTOM DEFROST HEATERS	---	208-230V	1	5.77	5.77
1	TOP COMPRESSOR	---	208-230V	1	2.73	2.73
1	BOTTOM COMPRESSOR	---	208-230V	1	2.70	2.70
4	CONDENSER COIL FAN MOTOR	---	208-230V	1	0.10	0.40
1	EVAP PAN	---	208-230V	1	3.18	3.18

*NOT INCLUDED IN TOTAL
*NOT INCLUDED IN TOTAL

CIRCUIT#1 TOTAL AMPS: 15.21* VOLTAGE: 208-230/160 CONNECTION: HARDWIRED
 * NOT ALL ELECTRICAL COMPONENTS RUN CONCURRENTLY (COMPRESSORS WILL NOT RUN DURING DEFROST)
 MODEL: MDD-81TSCF APPLICATION: FROZEN BTUH: 4214 EVAP TEMP: -31°F
 DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION
 * R290 (PROPANE) REFRIGERATION AVAILABLE

TOP PACKOUT VOLUME: 11.94 CUBIC FT.
 TOP INTERNAL VOLUME: 13.64 CUBIC FT.
 BOTTOM PACKOUT VOLUME: 6.55 CUBIC FT.
 BOTTOM INTERNAL VOLUME: 10.91 CUBIC FT.

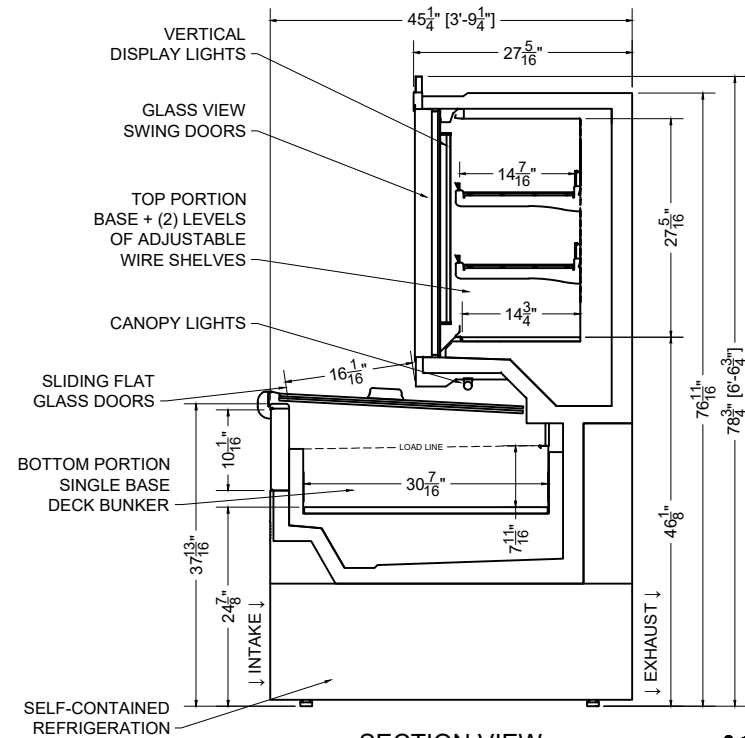

SECTION VIEW

