

PLAN MECHANICAL VIEW

05.1-MDD-81TNF-S = SELF-CONTAINED, 2 DOOR DIABLO

00.11	IDD OTTING CEEL CONTINUED, 2 DOOR	DI//DEO					
QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS	
4	59" LED 4000K, 24V	LG-FX-XXX-X	208-230V	1	0.67	2.67	
2	EVAPORATOR FAN	AFXXX	208-230V	1	0.10	0.20	
1	DOOR HEATERS		208-230V	1	1.14	1.14	
1	DEFROST HEATERS		208-230V	1	9.09	9.09	
1	COMPRESSOR		208-230V	1	6.17	6.17	*NOT INCLUDED IN TOTAL
3	CONDENSER COIL FAN MOTOR		208-230V	1	0.10	0.30	
1	CONDENSATE PUMP		208-230V	1	0.25	0.25	
1	EVAP PAN		208-230V	1	1.82	1.82	


CIRCUIT#1 TOTAL AMPS:15.46* VOLTAGE:208-230/1/60 CONNECTION: 6-30P

* NOT ALL ELECTRICAL COMPONENTS RUN CONCURRENTLY (COMPRESSOR WILL NOT RUN DURING DEFROST) MODEL: MDD-81TNF APPLICATION: FROZEN BTUH:3491 EVAP TEMP: -31°F

DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

* R290 (PROPANE) REFRIGERATION AVAILABLE

PACKOUT VOLUME: 53.67 CUBIC FT. INTERNAL VOLUME: 58.41 CUBIC FT.

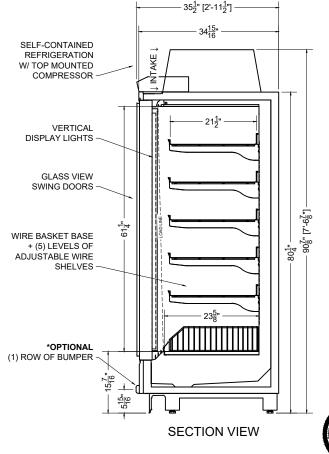



§ 038253 **EAME**

§ #02- 04/04/24

