


## PLAN MECHANICAL VIEW

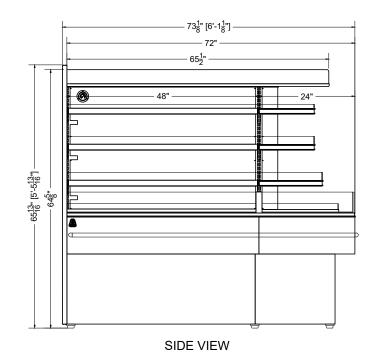

## 05.9-MDI-4M1F-R = 4' CENTER + (1) FULL-RADIUS END

	05.9-MDI-4M1F-R = 4' CENTER + (1) FULL-RADIUS END							PLACID	
[	QTY		DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS	
[	4		12" LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.02	0.08	
[	1		18" LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.03	0.03	
ſ	8		45" LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.09	0.72	
[	8		EVAPORATOR FAN	AFXXX	115V	1	0.24	1.92	
	CIRCL	JIT#1 (LIGHTS)	T#1 (LIGHTS) TOTAL AMPS:0.83		VOLTAGE:115/1/60		CONNECTION: HARDWIRED		
	CIRCUIT#2 (FANS)		TOTAL AMPS:1.92	VOLTAGE:115/1/60		CONNECTION: HARDWIRED			

BTUH:9793

CIRCUIT#2 (FANS) TOTAL AMPS:1.92 MODEL: MDI-4M APPLICATION: DELI

WEIGHT: 1030 LBS

DEFROST: TIME-OFF, 4/40MIN, 47° TEMP TERMINATION SHIPPING DIMENSIONS: 86" X 60" X 76"


PACKOUT VOLUME: 33.35 CUBIC FT. INTERNAL VOLUME: 42.64 CUBIC FT.

CONFORMS TO UL STD 471. CONFORMS TO NSF STD 7. CERTIFIED TO CAN/CSA STD C22.2 NO. 120.



EVAP TEMP: 28°F



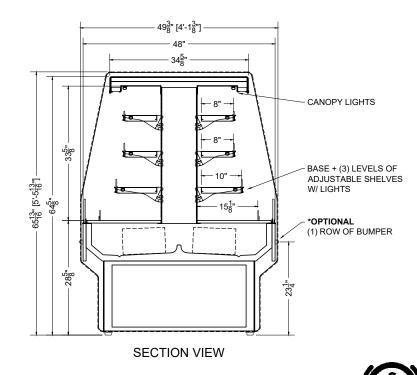

**SPECIFICATION SHEET** 

୭୦5.9-MDI-4M1F-R - (1) Full-Radius End

≝AME

<sup>\*</sup> 037910

§ #09- 12/08/23

