


PLAN MECHANICAL VIEW

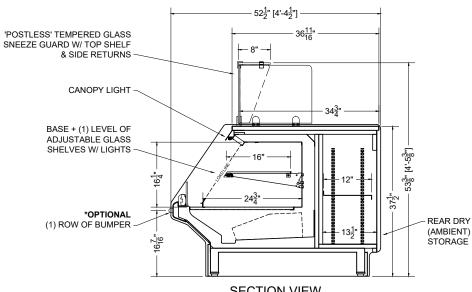

SECTION VIEW

≥ #01 - 06/30/23

DRAWING DETAILS SUBJECT TO CHANGE DURING THE ENGINEERING PROCESS

② 037476

**EAME** 



## **F SPECIFICATION SHEET**

06.0-BCX-BYWC-R Self-Service Bakery W/ Work Counter

CONFIDENTIAL DOCUMENT: HID DRAWING IS CONFIDENTIAL AND THE PROPERTY OF SOUTHERN CASEARTS, INC AND IS NOT TO BE REPRODUCED OR EXCHANGED WITH ANY OTHER PERSON OR COMPANY WITHOUT THE EXPRESS WRITTEN CONSENT OF SOUTHERN CASEARTS, INC. HIDesigni001 Product Line Documents/Prior To 2021/200. Service GaseBCXEWVCADBCX-8WVC.avg

COPYRIGHT ©2023 SOUTHERN CASEARTS, INC. ALL RIGHTS RESERVED 1/2" = 1'

	QTY		DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
	6	34"	LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.07	0.42
	3		EVAPORATOR FAN	RF-FA-XXXX	115V	1	0.17	0.51
	CIRCUIT#1 (LIGHTS)		TOTAL AMPS:0.42	VOLTAGE:115/1/60		CONNECTION: HARDWIRED		
	CIRCUIT#2 (FANS)		TOTAL AMPS:0.51	VOLTAGE:115/	CONNECTION: HARDWIRED			
MODEL:B		BCX-BYWC APPLICATION: BAKERY / PASTRY		BTUH:3000		EVAP TEMP: 22		
	DEFROST: TIME-OFF, 4/30MIN, 47° TEMP TERMINATION							

\* OPTIONAL COMPONENT LOAD INCLUDED

CONFORMS TO UL STD 471. CONFORMS TO NSF STD 7. CERTIFIED TO CAN/CSA STD C22.2 NO. 120



## 06.0-BCX-BYWC-R