


PACKOUT VOLUME: 20.15 CUBIC FT. INTERNAL VOLUME: 31.82 CUBIC FT.

* OPTIONAL COMPONENT LOAD INCLUDED

CONFORMS TO UL STD 471. CONFORMS TO NSF STD 7. CERTIFIED TO CAN/CSA STD C22.2 NO. 120.





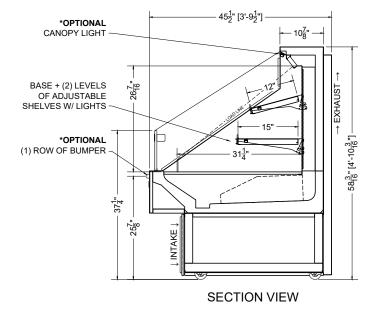

^{*} 038019 **EAME**

≥ #IR- 01/23/24

