


PLAN MECHANICAL VIEW

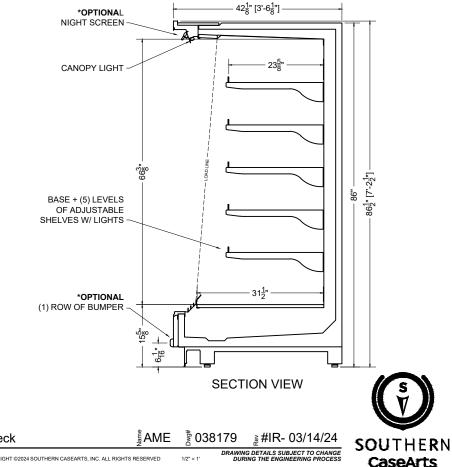

06	06.2-MDC-87ADM-R								SHEYENNE	
	γtς		DESCRIPTION		PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS	
	12	34" LED 4000K, 24V			LG-FX-XXX-X	115V	1	0.38	4.50	
	3		EVAPORATOR FAN		AFXXX	115V	1	0.20	0.60	
0	CIRCUIT#1 (LIGHTS) TOTAL AMPS:6.00				VOLTAGE:115/1/60		CONNECTION: HARDWIRED			
Ċ	CIRCU	IT#2 (FANS) TOTAL AMPS:0.60			VOLTAGE:115/1/60		CONNECTION: HARDWIRED			
Ň	NODE	L:MDC-87ADM	APPLICATION: DELI		BTUH: 10812			EVAP TEMP: 14°F		
_ C	DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION									

PACKOUT VOLUME: 82.26 CUBIC FT. INTERNAL VOLUME: 107.16 CUBIC FT.

F SPECIFICATION SHEET

§06.2-MDC-87ADM-R Refrigerated Multi-Deck

CONFIDENTIAL DOCUMENT: THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF SOUTHERN CASEARTS, INC AND IS NOT TO BE REPRODUCED OR EXCHANGED HIDesign1001 Product Line Documents/Prior To 2021300 - Multi-LeveMIDOCISTADM (IC)/CADMIDC/STADM (IC)/CADMIDADA

COPYRIGHT ©2024 SOUTHERN CASEARTS, INC. ALL RIGHTS RESERVED