

PLAN MECHANICAL VIEW

06.2-MDD-81TSCF-S (SELF-CONTAINED, 3 DOOR)

MYSTIC

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
6	22" LED 4000K, 24V	LG-FX-XXX-X	208-230V	1	0.32	1.93
2	33" LED 4000K, 24V	LG-FX-XXX-X	208-230V	1	0.38	0.75
6	EVAPORATOR FAN	AFXXX	208-230V	1	0.10	0.60
1	TOP DEFROST HEATERS	---	208-230V	1	5.52	5.52
1	BOTTOM DEFROST HEATERS	---	208-230V	1	8.66	8.66
2	TOP COMPRESSOR	---	208-230V	1	2.70	5.40
2	BOTTOM COMPRESSOR	---	208-230V	1	2.53	5.06
8	CONDENSER COIL FAN MOTOR	---	208-230V	1	0.10	0.80
1	EVAP PAN	---	208-230V	1	5.00	5.00

CIRCUIT#1 TOTAL AMPS: 23.26\* VOLTAGE: 208-230/1/60 CONNECTION: HARDWIRED

\* NOT ALL ELECTRICAL COMPONENTS RUN CONCURRENTLY (COMPRESSORS WILL NOT RUN DURING DEFROST)


MODEL: MDD-81TSCF APPLICATION: FROZEN BTUH: 7738 EVAP TEMP: -31°F

DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

\* R290 (PROPANE) REFRIGERATION AVAILABLE

TOP PACKOUT VOLUME: 17.91 CUBIC FT.  
 TOP INTERNAL VOLUME: 20.47 CUBIC FT.  
 BOTTOM PACKOUT VOLUME: 9.83 CUBIC FT.  
 BOTTOM INTERNAL VOLUME: 16.37 CUBIC FT.

\*NOT INCLUDED IN TOTAL  
 \*NOT INCLUDED IN TOTAL

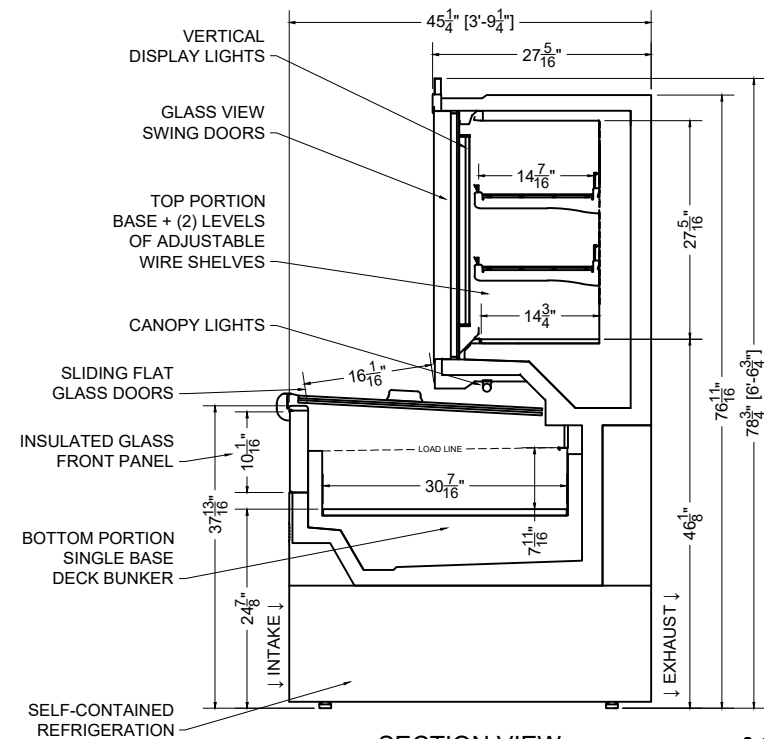

SECTION VIEW

