


08.0-EVO-04N-R (A0,B0,C0,D0)

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
16	45° LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.09	1.44
12	EVAPORATOR FAN	AFXXX	115V	1	0.24	2.88

CIRCUIT#1 (LIGHTS) TOTAL AMPS: 1.44 VOLTAGE: 115/1/60 CONNECTION: HARDWIRED
 CIRCUIT#2 (FANS) TOTAL AMPS: 2.88 VOLTAGE: 115/1/60 CONNECTION: HARDWIRED
 MODEL: EVO-04N APPLICATION: DELI BTUH: 16368 EVAP TEMP: 22°F
 DEFROST: TIME-OFF, 4/40MIN, 47° TEMP TERMINATION

CONFORMS TO UL STD 471.
 CONFORMS TO NSF STD 7.
 CERTIFIED TO CAN/CSA STD
 C22.2 NO. 120.

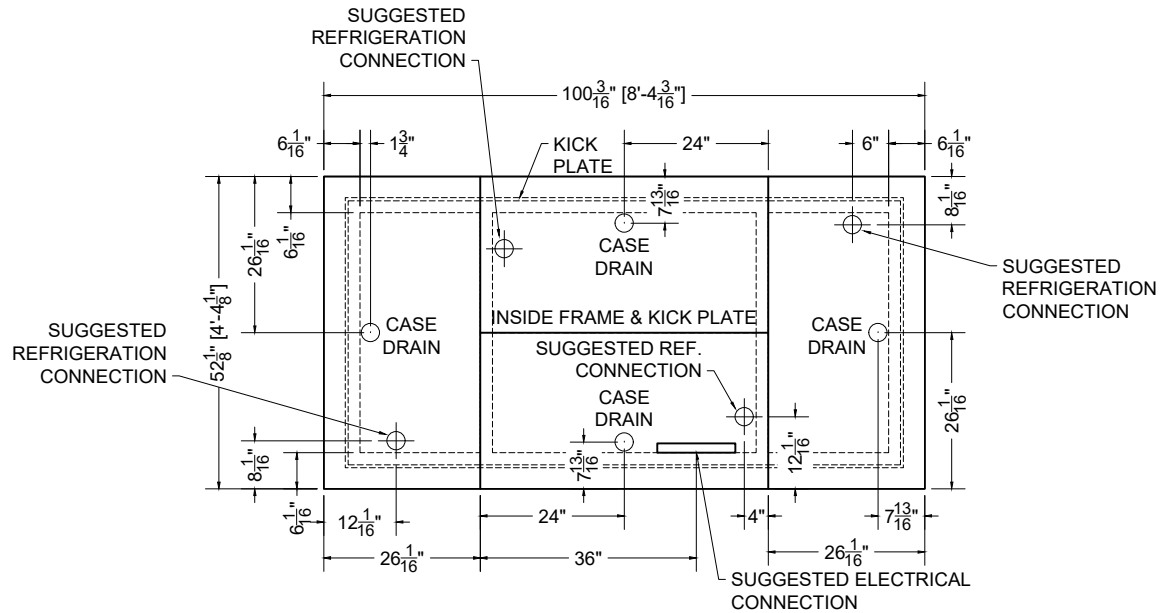

PLAN MECHANICAL VIEW

