

PLAN MECHANICAL VIEW


08.2-MDC-81AVH-S (SELF-CONTAINED)

BISMARK

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
12	45° LED 4000K 24V	LG-FX-XXX-X	115V	1	0.50	6.00
4	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.80
2	COMPRESSOR	--	115V	1	6.92	13.84
4	CONDENSER COIL FAN MOTOR	--	115V	1	0.20	0.80
1	EVAP PAN	--	115V	1	12.17	12.17

CIRCUIT#1 TOTAL AMPS: 33.61 VOLTAGE: 115/1/60 CONNECTION: 5-50P
 MODEL: MDC-81AVH APPLICATION: DELI BTUH: 6408 EVAP TEMP: 14°F
 DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION
 * R290 (PROPANE) REFRIGERATION AVAILABLE

PACKOUT VOLUME: 52.90 CUBIC FT.
 INTERNAL VOLUME: 67.12 CUBIC FT.

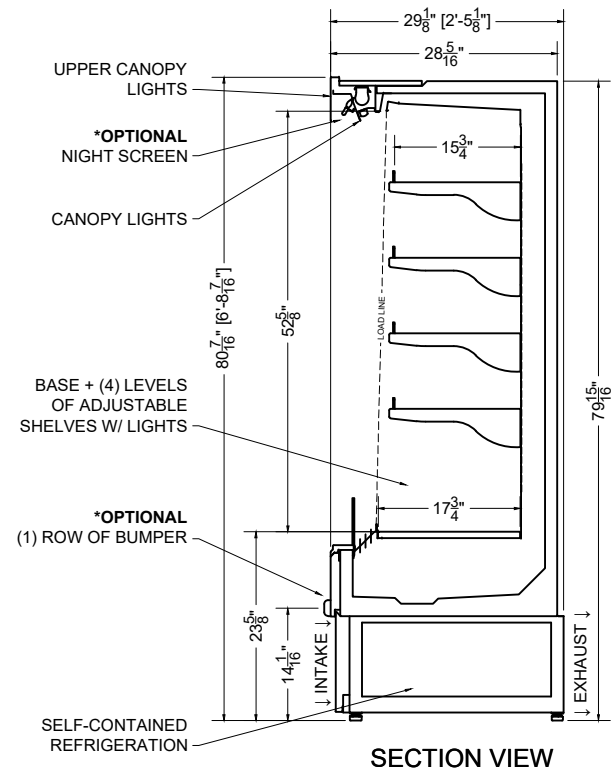

SECTION VIEW

PROJ SPECIFICATION SHEET

Des 08.2-MDC-81AVH-S Refrigerated Multi-Deck (S/C)

Name AME Dwg# 038115 Rev #IR- 02/23/24

CONFIDENTIAL DOCUMENT: THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF SOUTHERN CASEARTS, INC AND IS NOT TO BE REPRODUCED OR EXCHANGED WITH ANY OTHER PERSON OR COMPANY WITHOUT THE EXPRESS WRITTEN CONSENT OF SOUTHERN CASEARTS, INC.

COPYRIGHT ©2023 SOUTHERN CASEARTS, INC. ALL RIGHTS RESERVED

1/2" = 1'

DRAWING DETAILS SUBJECT TO CHANGE DURING THE ENGINEERING PROCESS



SOUTHERN CaseArts