
10.1-FSE-HCI3-H

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS	L1	L2
18	12" LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.02	0.36	0.36	
12	29" LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.05	0.60	0.60	
6	34" LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.07	0.42	0.42	
8	FOIL HEATER, SHELF, 3'	FS-HT-0588-A	208V	1	2.70	21.60	21.60	21.60
8	FOIL HEATER, CUSTOMER LEFT	FS-HT-0962-A	208V	1	2.02	16.16	16.16	16.16
8	FOIL HEATER, CUSTOMER RIGHT	FS-HT-0963-A	208V	1	2.02	16.16	16.16	16.16
8	FOIL HEATER, RADIUS END	FS-HT-0964-A	208V	1	1.78	14.24	14.24	14.24
CIRCI	IIT#1 (LOAD CENTER) TOTAL AMPS: (L1 = 69.54 / L2 = 68.16)	VOLTAGE 208/1/60_3-WIRE		CONNECTION HARDWIRED				

CONFORMS TO UL STD 197. CONFORMS TO NSF STD 4. CERTIFIED TO CAN/CSA STD C22.2 NO. 120.



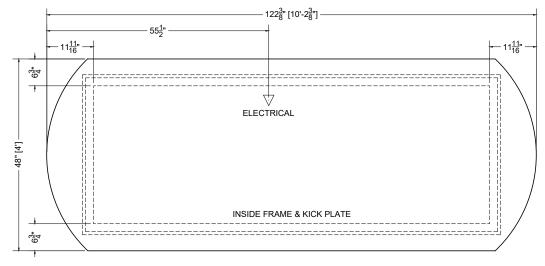

PLAN MECHANICAL VIEW

