

Project	Name _
---------	--------

Model # \_

Approval \_\_\_\_

\_\_\_\_ Qty \_\_\_\_\_ Item # \_\_\_

AIA# \_\_ SIS#

# Coronado Service Merchandiser | Cold SCS-47ASBR-R & SCS-49ASIR-R



# southerncasearts.com 800.552.6283



## OVERVIEW 業

## The Coronado Service


Merchandiser from Southern CaseArts is sure to become a reliable favorite in your store. Available in five lengths and two style options, this case provides energy efficiency and maximum packout. The Coronado features LED canopy lighting, full view tempered glass, and convenient refrigerated rear storage - customers and employees will love it.

# **STANDARD FEATURES**

- Nominal Length: 3.1', 4.1', 6.2', 8.2' & 12.3'
- Interior Lighting: 2700K LED lights
- Exterior: Tempered glass, black powder coat and stainless steel

# PRODUCT CATEGORIES

Prepared Food



Beverages



Dairy






## 03.1-SCS-47ASBR-R | Coronado Service Merchandiser

QTY	DESCRIPTI	NO	PART N	UMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
1	34" LED 2700K, 24V		LG-FX	-XXX-X	115V	1	0.38	0.38
1	EVAPORATOR FAN		AF	<xx< td=""><td>115V</td><td>1</td><td>0.08</td><td>0.08</td></xx<>	115V	1	0.08	0.08
1	AIR SWEEP FAN		AF	<xx< td=""><td>115V</td><td>1</td><td>0.08</td><td>0.08</td></xx<>	115V	1	0.08	0.08
CIRCUI CIRCUI MODEL	T#1 (LIGHTS) T#2 (FANS) T#3 (ANTI-COND.) .: SCS-47ASBR <b>ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS TOTAL AMPS TOTAL AMPS APPLICATIO N, 50° TEMP 1	5: 0.08 5: 0.08 N: FRESH	VOLTAGE VOLTAGE MEAT	: 115/1/60 : 115/1/60 : 115/1/60 BTUH: 175 PACKO	CONNECT CONNECT CONNECT 8 DUT VOLU	TION: HAI TION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

INTERNAL VOLUME: 14.27 CUBIC FT. REAR STORAGE: 3.11 CUBIC FT.




#### southerncasearts.com

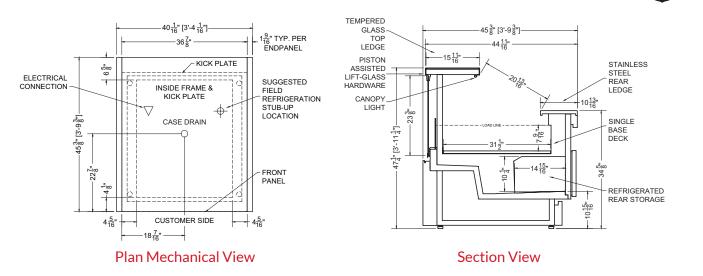

## 04.1-SCS-47ASBR-R | Coronado Service Merchandiser

QTY	DESCRIPTI	on pai	RTNUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
1	45" LED 2700K, 24V	LC	G-FX-XXX-X	115V	1	0.50	0.50
1	EVAPORATOR FAN		AFXXX	115V	1	0.08	0.08
1	AIR SWEEP FAN		AFXXX	115V	1	0.08	0.08
CIRCUI CIRCUI MODEI	T#1 (LIGHTS) T#2 (FANS) T#3 (ANTI-COND.) L: SCS-47ASBR I <b>ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS: 0.5 TOTAL AMPS: 0.0 TOTAL AMPS: 0.0 APPLICATION: F N, 50° TEMP TERM	08 VOLTAGE 08 VOLTAGE RESH MEAT	E: 115/1/60 E: 115/1/60 E: 115/1/60 BTUH: 234	CONNECT CONNECT CONNECT	TION: HAI TION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

PACKOUT VOLUME: 6.79 CUBIC FT. INTERNAL VOLUME: 19.03 CUBIC FT. REAR STORAGE: 4.23 CUBIC FT.

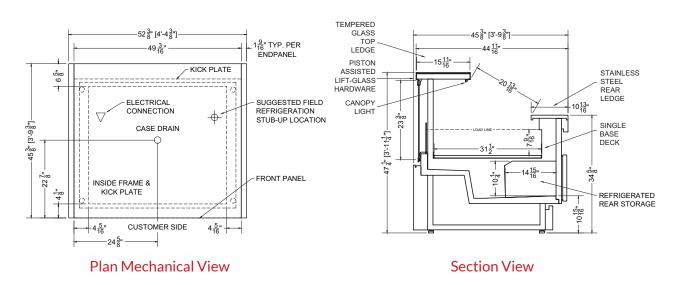




#### southerncasearts.com

## 06.2-SCS-47ASBR-R | Coronado Service Merchandiser

QTY	DESCRIPTI	ON PA	ART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	34" LED 2700K, 24V	I	LG-FX-XXX-X	115V	1	0.38	0.75
2	EVAPORATOR FAN		AFXXX	115V	1	0.08	0.16
2	AIR SWEEP FAN		AFXXX	115V	1	0.08	0.16
CIRCUI CIRCUI MODEI	IT#1 (LIGHTS) IT#2 (FANS) IT#3 (ANTI-COND.) L: SCS-47ASBR <b>PST:</b> TIME-OFF, 4/45MI	TOTAL AMPS: 0 TOTAL AMPS: 0 TOTAL AMPS: 0 APPLICATION: N, 50° TEMP TER	.16 VOLTAGI .16 VOLTAGI FRESH MEAT	E: 115/1/60	CONNECT CONNECT CONNECT 9	TION: HAI	RDWIRED

PACKOUT VOLUME: 10.19 CUBIC FT. INTERNAL VOLUME: 28.55 CUBIC FT. REAR STORAGE: 6.45 CUBIC FT.

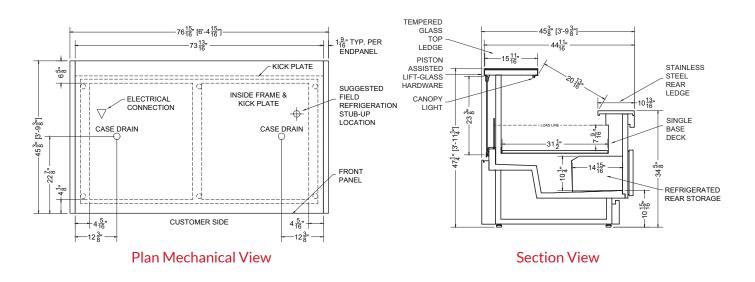

### 08.2-SCS-47ASBR-R | Coronado Service Merchandiser


QTY	DESCRIPTI	ON PAR	TNUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	45" LED 2700K, 24V	LG	-FX-XXX-X	115V	1	0.50	1.00
3	EVAPORATOR FAN		AFXXX	115V	1	0.08	0.24
2	AIR SWEEP FAN		AFXXX	115V	1	0.08	0.16
CIRCUI CIRCUI MODEI	IT#1 (LIGHTS) IT#2 (FANS) IT#3 (ANTI-COND.) L: SCS-47ASBR <b>/ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS: 1.00 TOTAL AMPS: 0.24 TOTAL AMPS: 0.14 APPLICATION: FR N, 50° TEMP TERM	VOLTAGI VOLTAGI ESH MEAT	E: 115/1/60 E: 115/1/60 E: 115/1/60 BTUH: 469	CONNECT CONNECT CONNECT 2	FION: HAI FION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

PACKOUT VOLUME: 13.59 CUBIC FT. INTERNAL VOLUME: 38.06 CUBIC FT. REAR STORAGE: 8.67 CUBIC FT.



#### southerncasearts.com




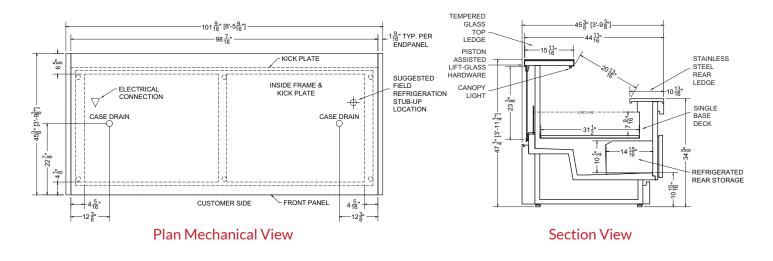

## 12.3-SCS-47ASBR-R | Coronado Service Merchandiser

Q	ΓY	DESCRIPTI	ON	PART N	UMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
3	3	45" LED 2700K, 24V		LG-FX	-XXX-X	115V	1	0.50	1.50
4	1	EVAPORATOR FAN		AFX	XXX	115V	1	0.08	0.32
3	3	AIR SWEEP FAN		AF	XXX	115V	1	0.08	0.24
CIR CIR MO	CUI CUI DEL	T#1 (LIGHTS) T#2 (FANS) T#3 (ANTI-COND.) : SCS-47ASBR <b>ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS TOTAL AMPS TOTAL AMPS APPLICATIO N, 50° TEMP	5: 0.32 5: 0.24 N: FRESH	VOLTAGE VOLTAGE MEAT	: 115/1/60 : 115/1/60 : 115/1/60 BTUH: 703 PACKO	CONNECT CONNECT CONNECT 7 UT VOLUM	TION: HAI TION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

PACKOUT VOLUME: 20.38 CUBIC F1. INTERNAL VOLUME: 57.09 CUBIC FT. REAR STORAGE: 13.12 CUBIC FT.

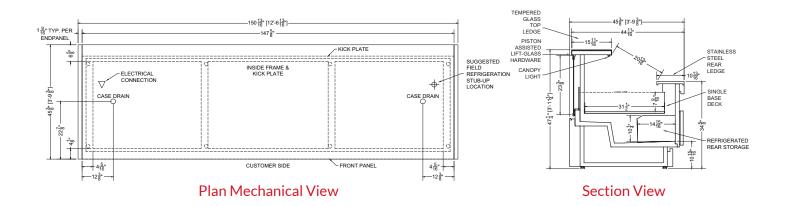




#### southerncasearts.com

## 03.1-SCS-49ASIR-R | Coronado Service Merchandiser

DESCRIPTIO	ON P/	ARTNU	JMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
34" LED 2700K, 24V	l	LG-FX-X	XXX-X	115V	1	0.38	0.38
EVAPORATOR FAN		AFX	XX	115V	1	0.08	0.08
AIR SWEEP FAN		AFX	XX	115V	1	0.08	0.08
#1 (LIGHTS) #2 (FANS) #3 (ANTI-COND.) SCS-49ASIR E TIME OFF 4/4EMI	TOTAL AMPS: 0 TOTAL AMPS: 0 APPLICATION:	.08 .08 FRESH	VOLTAGE: VOLTAGE: MEAT	115/1/60 115/1/60	CONNECT CONNECT	ION: HAI	RDWIRED
	34" LED 2700K, 24V EVAPORATOR FAN AIR SWEEP FAN #1 (LIGHTS) #2 (FANS) #3 (ANTI-COND.) SCS-49ASIR	34" LED 2700K, 24V 1   EVAPORATOR FAN 41   AIR SWEEP FAN 707AL AMPS: 0   #1 (LIGHTS) TOTAL AMPS: 0   #2 (FANS) TOTAL AMPS: 0   #3 (ANTI-COND.) TOTAL AMPS: 0   5CS-49ASIR APPLICATION:	34" LED 2700K, 24V LG-FX- EVAPORATOR FAN AFX AIR SWEEP FAN AFX #1 (LIGHTS) TOTAL AMPS: 0.38 #2 (FANS) TOTAL AMPS: 0.08 #3 (ANTI-COND.) TOTAL AMPS: 0.08 65CS-49ASIR APPLICATION: FRESH	34" LED 2700K, 24V LG-FX-XXX-X   EVAPORATOR FAN AFXXX   AIR SWEEP FAN AFXXX   #1 (LIGHTS) TOTAL AMPS: 0.38 VOLTAGE:   #2 (FANS) TOTAL AMPS: 0.08 VOLTAGE:   #3 (ANTI-COND.) TOTAL AMPS: 0.08 VOLTAGE:	34" LED 2700K, 24V     LG-FX-XXX-X     115V       EVAPORATOR FAN     AFXXX     115V       AIR SWEEP FAN     AFXXX     115V       #1 (LIGHTS)     TOTAL AMPS: 0.38     VOLTAGE: 115/1/60       #2 (FANS)     TOTAL AMPS: 0.08     VOLTAGE: 115/1/60       #3 (ANTI-COND.)     TOTAL AMPS: 0.08     VOLTAGE: 115/1/60       SCS-49ASIR     APPLICATION: FRESH MEAT     BTUH: 175	34" LED 2700K, 24V     LG-FX-XXX-X     115V     1       EVAPORATOR FAN     AFXXX     115V     1       AIR SWEEP FAN     AFXXX     115V     1       #1 (LIGHTS)     TOTAL AMPS: 0.38     VOLTAGE: 115/1/60     CONNECT       #2 (FANS)     TOTAL AMPS: 0.08     VOLTAGE: 115/1/60     CONNECT       #3 (ANTI-COND.)     TOTAL AMPS: 0.08     VOLTAGE: 115/1/60     CONNECT       5CS-49ASIR     APPLICATION: FRESH MEAT     BTUH: 1758     BTUH: 1758	34" LED 2700K, 24V     LG-FX-XXX-X     115V     1     0.38       EVAPORATOR FAN     AFXXX     115V     1     0.08       AIR SWEEP FAN     AFXXX     115V     1     0.08       #1 (LIGHTS)     TOTAL AMPS: 0.38     VOLTAGE: 115/1/60     CONNECTION: HAF       #2 (FANS)     TOTAL AMPS: 0.08     VOLTAGE: 115/1/60     CONNECTION: HAF       #3 (ANTI-COND.)     TOTAL AMPS: 0.08     VOLTAGE: 115/1/60     CONNECTION: HAF       5CS-49ASIR     APPLICATION: FRESH MEAT     BTUH: 1758     EVAP TE

PACKOUT VOLUME: 4.86 CUBIC FT. INTERNAL VOLUME: 13.07 CUBIC FT. REAR STORAGE: 3.11 CUBIC FT.

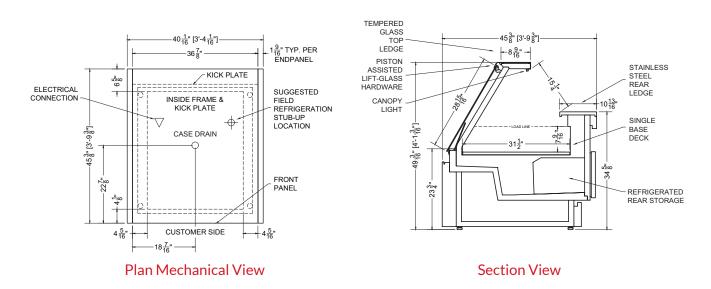


### 04.1-SCS-49ASIR-R | Coronado Service Merchandiser

QTY	DESCRIPTI	ON PA	RT NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
1	45" LED 2700K, 24V	L	.G-FX-XXX-X	115V	1	0.50	0.50
1	EVAPORATOR FAN		AFXXX	115V	1	0.08	0.08
1	AIR SWEEP FAN		AFXXX	115V	1	0.08	0.08
CIRCUI CIRCUI MODEL	T#1 (LIGHTS) T#2 (FANS) T#3 (ANTI-COND.) .: SCS-49ASIR <b>ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS: 0. TOTAL AMPS: 0. TOTAL AMPS: 0. APPLICATION: F N, 50° TEMP TER	08 VOLTAG 08 VOLTAG RESH MEAT	E: 115/1/60 E: 115/1/60 BTUH: 234	CONNECT CONNECT CONNECT 6	TION: HAI TION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

PACKOUT VOLUME: 6.48 CUBIC FT. INTERNAL VOLUME: 17.43 CUBIC FT. REAR STORAGE: 4.23 CUBIC FT.




#### southerncasearts.com

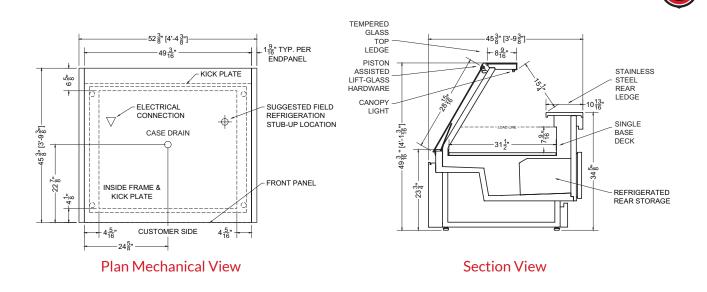

## 06.2-SCS-49ASIR-R | Coronado Service Merchandiser

QTY	DESCRIPTI	ON P	PART NUI	MBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	34" LED 2700K, 24V		LG-FX-X	XX-X	115V	1	0.38	0.75
2	EVAPORATOR FAN		AFXX	Х	115V	1	0.08	0.16
2	AIR SWEEP FAN		AFXX	Х	115V	1	0.08	0.16
CIRCUI CIRCUI MODEL	T#1 (LIGHTS) T#2 (FANS) T#3 (ANTI-COND.) .: SCS-49ASIR <b>ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS: TOTAL AMPS: TOTAL AMPS: APPLICATION N, 50° TEMP TE	0.16 V 0.16 V : FRESH M	OLTAGE OLTAGE MEAT	: 115/1/60 : 115/1/60 : 115/1/60 BTUH: 351	CONNECT CONNECT CONNECT 9	TION: HAI TION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

INTERNAL VOLUME: 9.72 CUBIC F1. REAR STORAGE: 6.45 CUBIC FT.

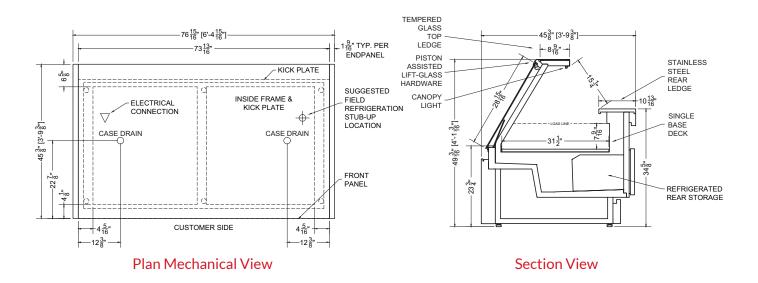




#### southerncasearts.com

## 08.2-SCS-49ASIR-R | Coronado Service Merchandiser

QTY	DESCRIPTI	ON P/	ART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	45" LED 2700K, 24V		LG-FX-XXX-X	115V	1	0.50	1.00
3	EVAPORATOR FAN		AFXXX	115V	1	0.08	0.24
2	AIR SWEEP FAN		AFXXX	115V	1	0.08	0.16
CIRCU CIRCU MODE	IT#1 (LIGHTS) IT#2 (FANS) IT#3 (ANTI-COND.) L: SCS-49ASIR DST: TIME-OFF, 4/45MI	TOTAL AMPS: 1 TOTAL AMPS: 0 TOTAL AMPS: 0 APPLICATION: N, 50° TEMP TER	0.24 VOLTAGI 0.16 VOLTAGI FRESH MEAT	: 115/1/60	CONNECT CONNECT CONNECT 2	TION: HAI	RDWIRED

PACKOUT VOLUME: 12.95 CUBIC FT. INTERNAL VOLUME: 34.86 CUBIC FT. REAR STORAGE: 8.67 CUBIC FT.

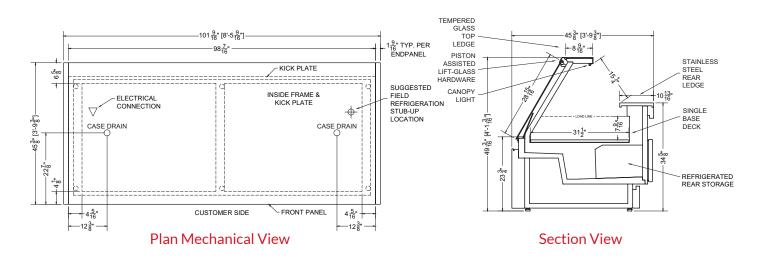

### 12.3-SCS-49ASIR-R | Coronado Service Merchandiser


QTY	DESCRIPTI	ON	PART N	UMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
3	45" LED 2700K, 24V		LG-FX	-XXX-X	115V	1	0.50	1.50
4	EVAPORATOR FAN		AF	XXX	115V	1	0.08	0.32
3	AIR SWEEP FAN		AF	XXX	115V	1	0.08	0.24
CIRCU CIRCU MODE	IT#1 (LIGHTS) IT#2 (FANS) IT#3 (ANTI-COND.) L: SCS-49ASIR <b>ST:</b> TIME-OFF, 4/45MI	TOTAL AMPS TOTAL AMPS TOTAL AMPS APPLICATIO N, 50° TEMP T	: 0.32 : 0.24 <b>N:</b> FRESH	VOLTAGE VOLTAGE MEAT	E: 115/1/60 E: 115/1/60 E: 115/1/60 BTUH: 703	CONNECT CONNECT CONNECT 37 UT VOLUM	FION: HAI FION: HAI EVAP TI	RDWIRED RDWIRED EMP: 14°F

PACKOUT VOLUME: 19.43 CUBIC FT. INTERNAL VOLUME: 52.29 CUBIC FT. REAR STORAGE: 13.12 CUBIC FT.



#### southerncasearts.com

S

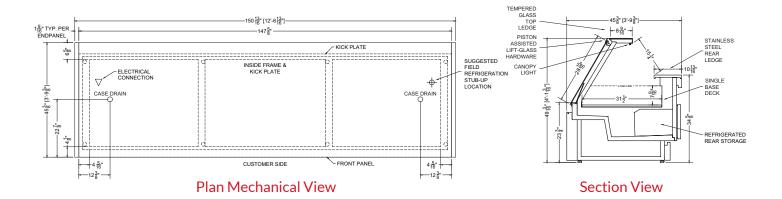

For more information on the Coronado Service Merchandiser, contact one of our **Southern CaseArts** representatives or check out our website to learn more about all of the products offered by **Southern CaseArts**.



#### southerncasearts.com

© 2024 Southern CaseArts. All rights reserved. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions. Page **8** of **8** (Rev 06/07/24)