SOUTHERN CaseArts
An LSI Company

Project Name _____
Model # _____ Qty _____ Item # _____
Approval _____ AIA# _____ SIS# _____

Ozark
Service Merchandiser | Cold
SCS-47ASBF-R & SCS-49ASIF-R

southerncasearts.com | 800.552.6283



OVERVIEW

The **Ozark Service Merchandiser** from **Southern CaseArts** is sure to become a reliable favorite in your store. Available in five lengths and two style options, this case provides energy efficiency and maximum packout. The **Ozark** features LED canopy lighting, full view tempered glass to really showcase meats, cheese, produce, sandwiches, deli and dairy.

STANDARD FEATURES

- **Nominal Length:** 3.1', 4.1', 6.2', 8.2' & 12.3'
- **Interior Lighting:** 2700K LED lights
- **Exterior:** Tempered glass, black powder coat and stainless steel

PRODUCT CATEGORIES

Meat | Deli | Cheese/ Dairy | Milk | Produce | Snacks/ Sandwiches


04.1-SCS-47ASBF-R | Ozark Service Merchandiser

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
1	45" LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.50	0.50
1	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.20
1	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.08


CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 0.50 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.20 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.08 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-47ASBF **APPLICATION:** FRESH MEAT **BTUH:** 1919 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 6.79 CUBIC FT.
INTERNAL VOLUME: 19.03 CUBIC FT.

© 2026 **Southern CaseArts**, an LSI Company. All Rights Reserved Worldwide. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

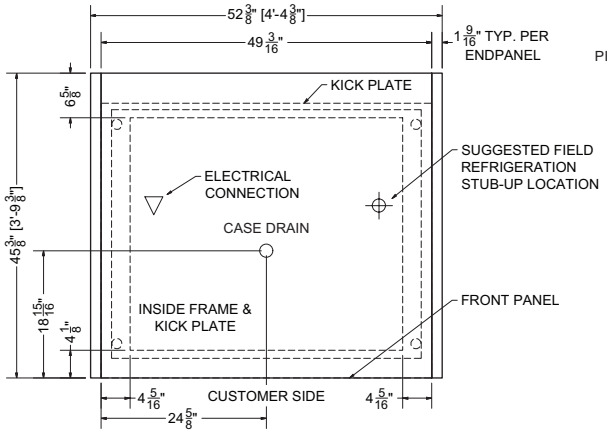

Plan Mechanical View

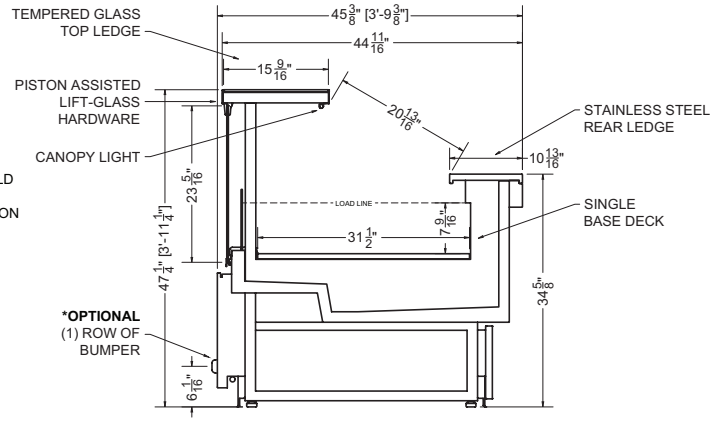


Section View

06.2-SCS-47ASBF-R | Ozark Service Merchandiser


QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	34" LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.38	0.75
2	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.40
2	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.16

CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 0.75 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.40 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.16 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-47ASBF **APPLICATION:** FRESH MEAT **BTUH:** 2879 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 10.19 CUBIC FT.
INTERNAL VOLUME: 28.55 CUBIC FT.

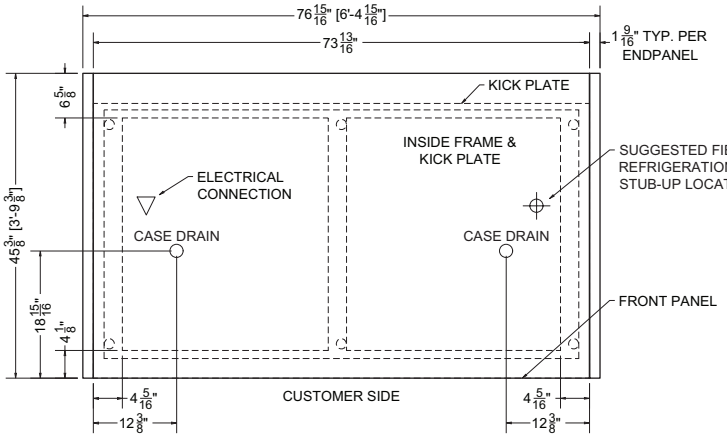

Plan Mechanical View

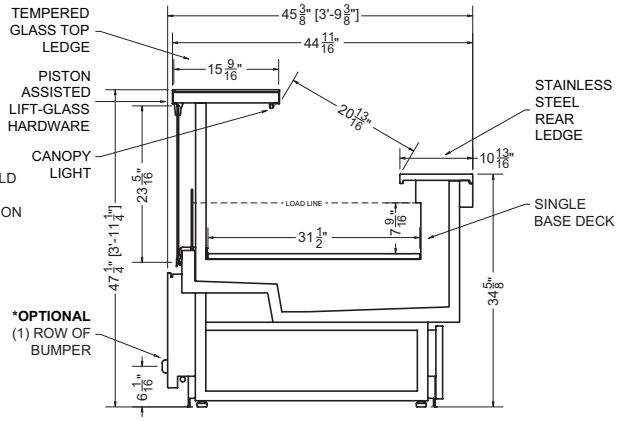

Section View


© 2026 **Southern CaseArts**, an LSI Company. All Rights Reserved Worldwide. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

08.2-SCS-47ASBF-R | Ozark Service Merchandiser


QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	45” LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.50	1.00
2	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.40
2	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.16

CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 1.00 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.40 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.16 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-47ASBF **APPLICATION:** FRESH MEAT **BTUH:** 3839 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 13.59 CUBIC FT.
INTERNAL VOLUME: 38.06 CUBIC FT.

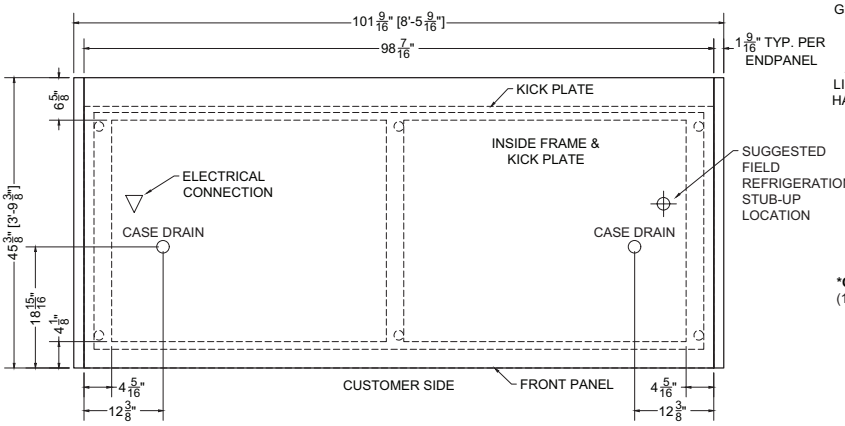

Plan Mechanical View

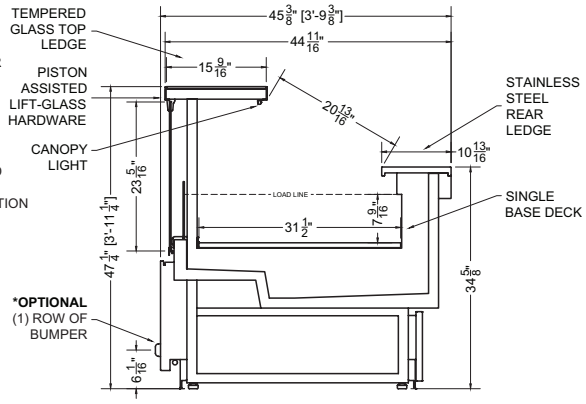

Section View


03.1-SCS-49ASIF-R | Ozark Service Merchandiser

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
1	34” LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.38	0.38
1	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.20
1	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.08


CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 0.38 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.20 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.08 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-49ASIF **APPLICATION:** FRESH MEAT **BTUH:** 1439 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 4.86 CUBIC FT.
INTERNAL VOLUME: 13.07 CUBIC FT.

© 2026 **Southern CaseArts,** an LSI Company. All Rights Reserved Worldwide. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

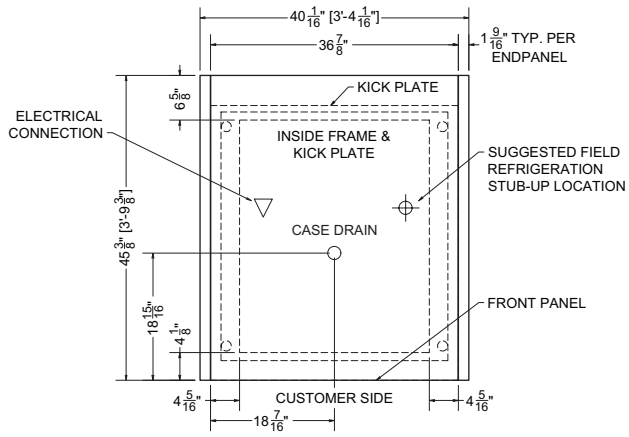

Plan Mechanical View

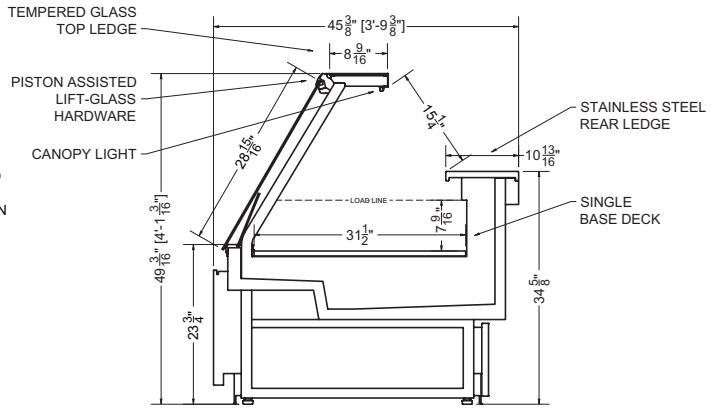


Section View

04.1-SCS-49ASIF-R | Ozark Service Merchandiser


QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
1	45" LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.50	0.50
1	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.20
1	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.08

CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 0.50 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.20 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.08 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-49ASIF **APPLICATION:** FRESH MEAT **BTUH:** 1919 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 6.48 CUBIC FT.
INTERNAL VOLUME: 17.43 CUBIC FT.

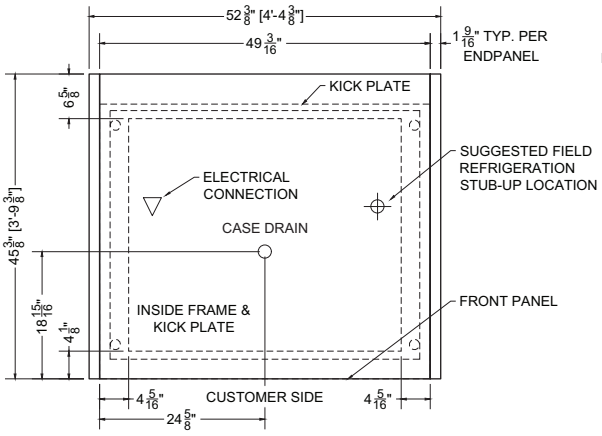

Plan Mechanical View

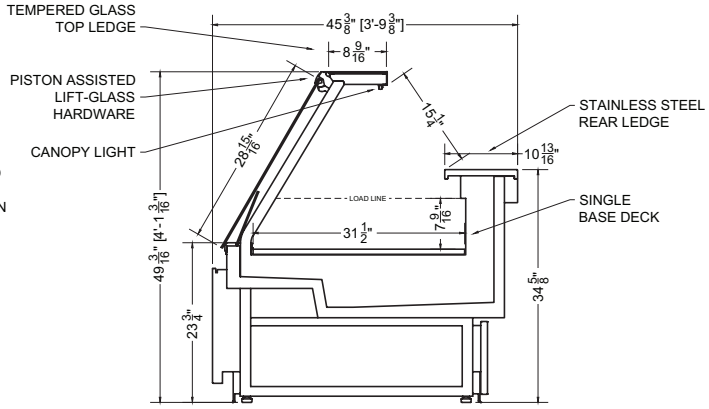

Section View


© 2026 **Southern CaseArts**, an LSI Company. All Rights Reserved Worldwide. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

06.2-SCS-49ASIF-R | Ozark Service Merchandiser


QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	34" LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.38	0.75
2	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.40
2	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.16

CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 0.75 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.40 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.16 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-49ASIF **APPLICATION:** FRESH MEAT **BTUH:** 2879 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 9.72 CUBIC FT.
INTERNAL VOLUME: 26.12 CUBIC FT.

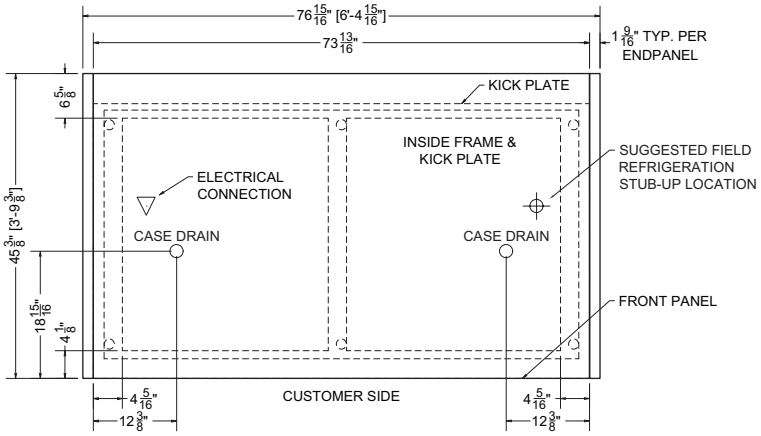

Plan Mechanical View

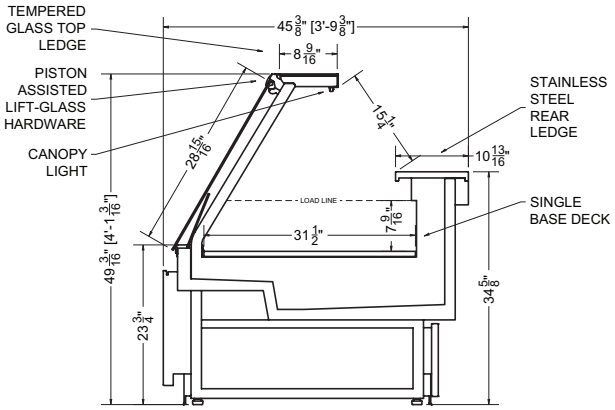

Section View


08.2-SCS-49ASIF-R | Ozark Service Merchandiser

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	45" LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.50	1.00
2	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.40
2	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.16


CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 1.00 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.40 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.16 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-49ASIF **APPLICATION:** FRESH MEAT **BTUH:** 3839 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 12.95 CUBIC FT.
INTERNAL VOLUME: 34.86 CUBIC FT.

© 2026 **Southern CaseArts**, an LSI Company. All Rights Reserved Worldwide. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

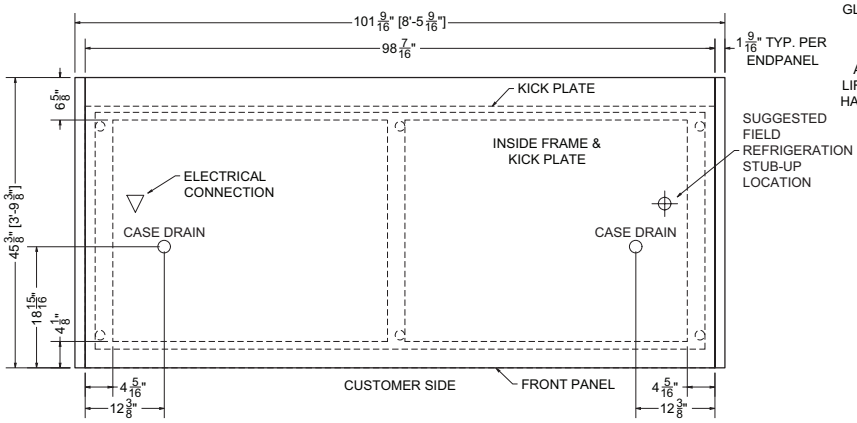

Plan Mechanical View

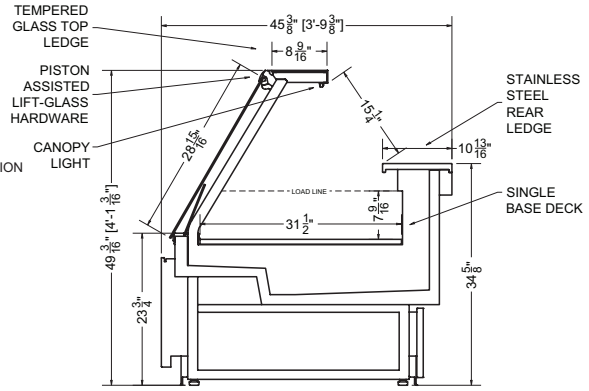


Section View

12.3-SCS-49ASIF-R | Ozark Service Merchandiser


QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
2	45" LED 2700K, 24V	LG-FX-XXX-X	115V	1	0.50	1.50
2	EVAPORATOR FAN	AFXXX	115V	1	0.20	0.60
2	AIR SWEEP FAN	AFXXX	115V	1	0.08	0.24

CIRCUIT#1 (LIGHTS) **TOTAL AMPS:** 1.50 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#2 (FANS) **TOTAL AMPS:** 0.60 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
CIRCUIT#3 (ANTI-COND.) **TOTAL AMPS:** 0.24 **VOLTAGE:** 115/1/60 **CONNECTION:** HARDWIRED
MODEL: SCS-49ASIF **APPLICATION:** FRESH MEAT **BTUH:** 5758 **EVAP TEMP:** 14°F
DEFROST: TIME-OFF, 4/45MIN, 50° TEMP TERMINATION

PACKOUT VOLUME: 19.43 CUBIC FT.
INTERNAL VOLUME: 52.29 CUBIC FT.

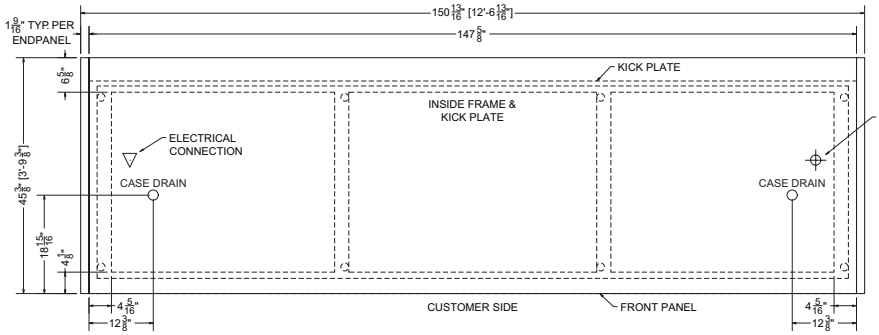

Plan Mechanical View

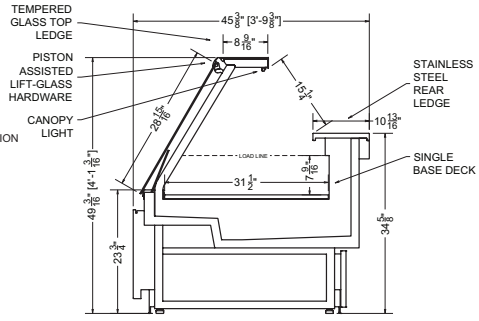

Section View

For more information on the Ozark Service Merchandiser, contact one of our **Southern CaseArts** representatives or check out our website to learn more about all of the products offered by **Southern CaseArts.**

© 2026 **Southern CaseArts,** an LSI Company. All Rights Reserved Worldwide. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.