

08.0-MDC-54HES-S MULTI-DECK DISPLAY (SELF-CONTAINED)


APPALACHIAN

QTY	DESCRIPTION	PART NUMBER	VOLTAGE	PHASE	AMPS	TOTAL AMPS
6	45° LED 3500K, FROSTED, 24V	LG-FX-XXX-X	115V	1	0.09	0.54
4	EVAPORATOR FAN	RF-FA-XXXX	115V	1	0.17	0.68
1	CONDENSING UNIT	RF-CU-0479-A	115V	1	11.90	11.90
1	CONDENSATE EVAP PAN / 1200W / FULL	EL-EV-XXXX	115V	1	10.00	10.00


CIRCUIT#1 TOTAL AMPS: 23.12 VOLTAGE: 115V/1/60 CONNECTION: L5-30P
 MODEL: MDC-54HES APPLICATION: DELI BTUH: 6960 EVAP TEMP: 24°F
 DEFROST: TIME-OFF, 4/40MIN, 47° TEMP TERMINATION
 SHIPPING DIMENSIONS: 108" X 48" X 68"
 WEIGHT: 1400 LBS

PACKOUT VOLUME: 34.06 CUBIC FT.
 INTERNAL VOLUME: 43.15 CUBIC FT.


CONFORMS TO UL STD 471.
 CONFORMS TO NSF STD 7.
 CERTIFIED TO OANCSA STD
 C22.2 NO. 120.

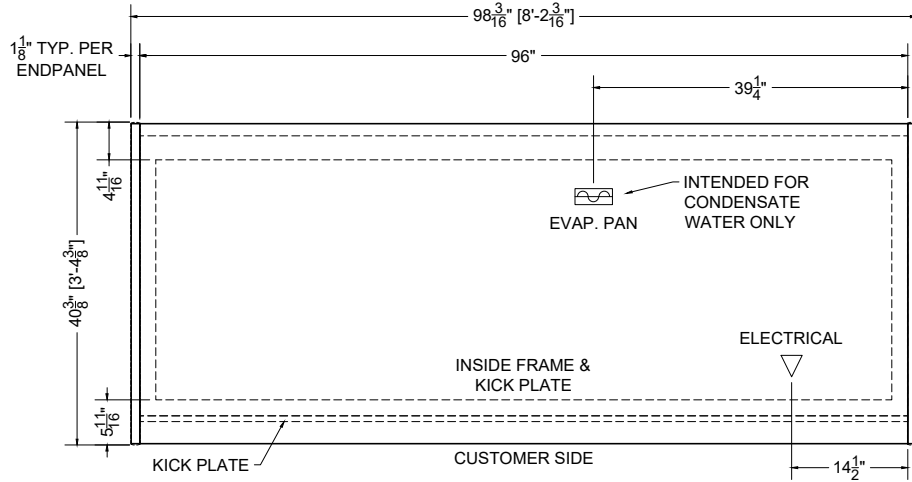

PLAN MECHANICAL VIEW

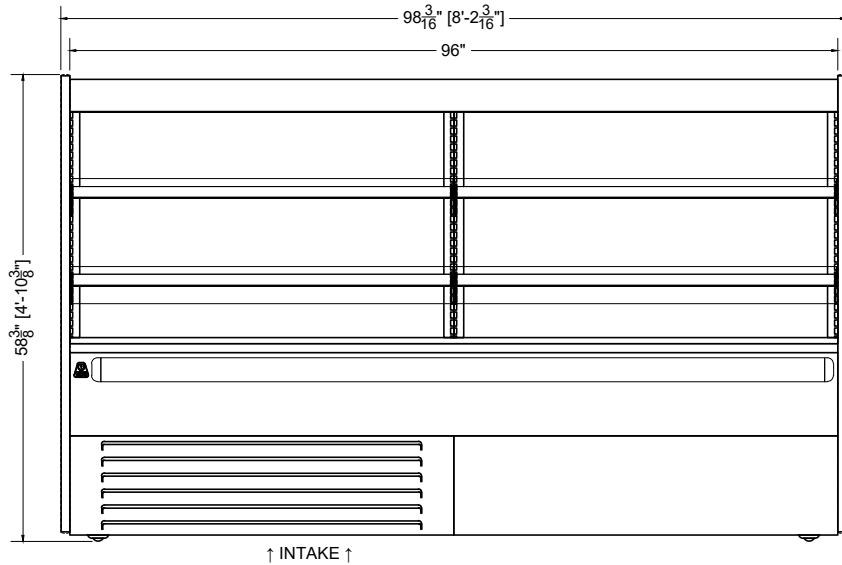

FRONT VIEW

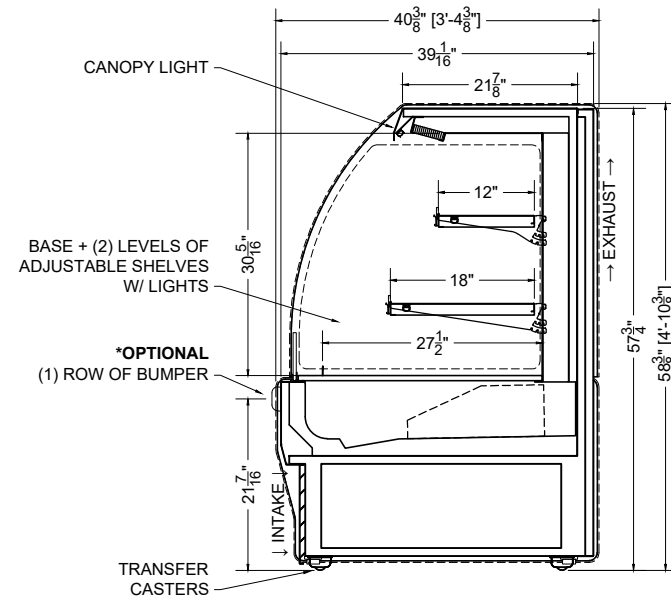

SECTION VIEW

PROJ SPECIFICATION SHEET

Des 08.0-MDC-54HES-S Multi-Deck Display (S/C)

Name AME Dwg# 038262 Rev #03- 04/10/24

CONFIDENTIAL DOCUMENT: THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF SOUTHERN CASEARTS, INC AND IS NOT TO BE REPRODUCED OR EXCHANGED WITH ANY OTHER PERSON OR COMPANY WITHOUT THE EXPRESS WRITTEN CONSENT OF SOUTHERN CASEARTS, INC.

COPYRIGHT ©2023 SOUTHERN CASEARTS, INC. ALL RIGHTS RESERVED

1/2" = 1'

DRAWING DETAILS SUBJECT TO CHANGE DURING THE ENGINEERING PROCESS



SOUTHERN CaseArts